
## CERTIFICATE

**Certified Passive House Component** 

Component-ID 0870wi03 valid until 31st December 2019

Passive House Institute Dr. Wolfgang Feist 64283 Darmstadt Germany

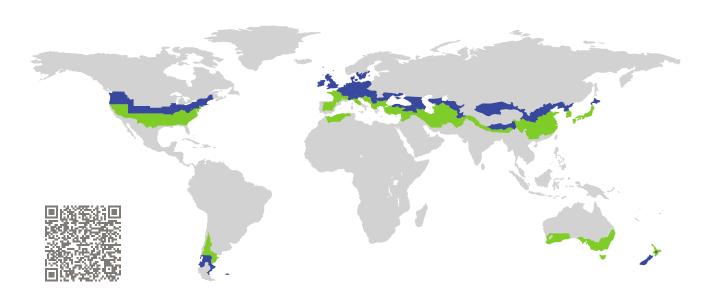

Category: Window Frame

Manufacturer: EuroFinestra s.a.s.,

Governolo di Roncoferraro,

Italy


Product name: CLIMA ENERGY 94

This certificate was awarded based on the following criteria for the cool, temperate climate zone

Comfort  $U_W = 0.80 \le 0.80 \text{ W/(m}^2 \text{ K)}$ 


 $U_{W,\text{installed}} \leq 0.85 \text{ W/(m}^2 \text{ K)}$ with  $U_q = 0.70 \text{ W/(m}^2 \text{ K)}$ 

Hygiene  $f_{Rsi=0.25}$   $\geq$  0.70



cool, temperate climate



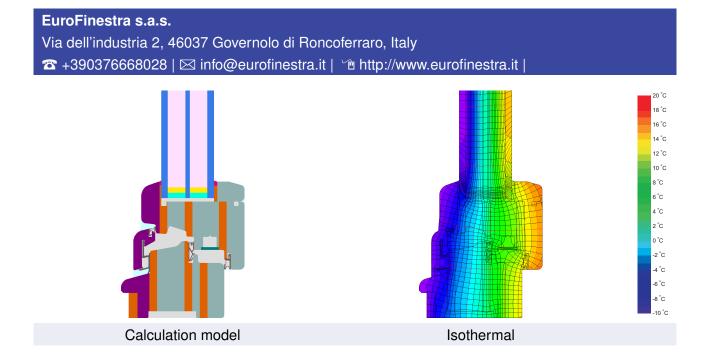

## **Description**

Timber-Cork Frame (Fir 0,11 W/mK, cork 0,04 W/mK). Pane thickness: 48 mm (6/16/4/16/6), rebate depth: 16 mm, spacer: Super Spacer Premium with butyl as secondary seal.

## **Explanation**

The window U-values were calculated for the test window size of 1.23 m  $\times$  1.48 m with  $U_g = 0.70$  W/(m<sup>2</sup> K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing 
$$U_g = \begin{bmatrix} 0.70 & 0.65 & 0.60 & 0.55 & W/(m^2 \text{ K}) \\ \downarrow & \downarrow & \downarrow & \downarrow \\ Window & U_W = \begin{bmatrix} 0.80 & 0.76 & 0.73 & 0.70 & W/(m^2 \text{ K}) \\ \end{bmatrix}$$

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

2/4 CLIMA ENERGY 94

Frame values			Frame width <i>b<sub>f</sub></i> mm	$U$ -value frame $U_f$ W/(m $^2$ K)	$\Psi$ -panel edge $\Psi_g$ W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Тор	(to)	Ť	112	0.79	0.027	0.73
Side	(s)	Ŋ-	112	0.79	0.027	0.73
Bottom	(bo)	Ţ	124	0.84	0.026	0.73
Mullion	(fm)	7	134	0.80	0.026	0.72
		Spacer: S	Super Spacer Premi	ium Se	Secondary seal: Butyl	

## Validated installations

